



LED Utility T8 Full Set


### Features

- Visual Flicker Free
- High Energy efficient, High lifetime
- Up to 18W 1900lm, 9W 950lm, Surge protection 1500V

### Benefits

- Stress free ambient light
- Up to 60% energy saving compared to conventional T8 Tube, consume less electricity
- More suitable for unstable power grid environment , Easy installation

### Application




### Specification

Item Description	Power (W)	Power Factor	Lumen (lm)	Efficacy (lm/W)	CRI	CCT (K)	Life Time (hrs) L70
LED U1 T8 Set 600mm 9W	9	0.5	900	100	70	3000	15000
LED U1 T8 Set 600mm 9W	9	0.5	950	105	70	4000/6500	15000
LED U1 T8 Set 1200mm 18W	18	0.5	1800	100	70	3000	15000
LED U1 T8 Set 1200mm 18W	18	0.5	1900	105	70	4000/6500	15000
LED U2 T8 Set 600mm 9W	9	0.5	900	100	70	3000	15000
LED U2 T8 Set 600mm 9W	9	0.5	950	105	70	4000/6500	15000
LED U2 T8 Set 1200mm 18W	18	0.5	1800	100	70	3000	15000
LED U2 T8 Set 1200mm 18W	18	0.5	1900	105	70	4000/6500	15000

Application Conditions	
IP	IP20
Operating Temperature	-20-45°C
Application Temperature	25°C
Storage Environment	-25-50°C

Electrical Supply	
Frequency (Hz)	50/ 60
Voltage (V)	220-240
AC/DC	AC

Mechanical Properties	
Optical Material	Glass
Housing Material	Aluminum+Iron
Finishing Colour	White

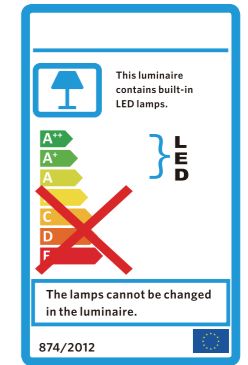

### Packaging Information

Item Description	Single Box(1pc/box)		Packaging Unit		
	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/unit)
LED U1 T8 Set 600mm 9W	630X45X35	0.27	650X235X235	5.4	20
LED U1 T8 Set 1200mm 18W	1230X45X35	0.50	1250X235X235	9.9	20
LED U2 T8 Set 600mm 9W	630X45X35	0.27	650X235X235	5.4	20
LED U2 T8 Set 1200mm 18W	1230X45X35	0.50	1250X235X235	9.9	20

### Dimensional Drawing



	9W	18W
L (mm)	610	1218
W (mm)	31.1	31.1
H (mm)	42.8	42.8